


Axia IP-Audio Driver

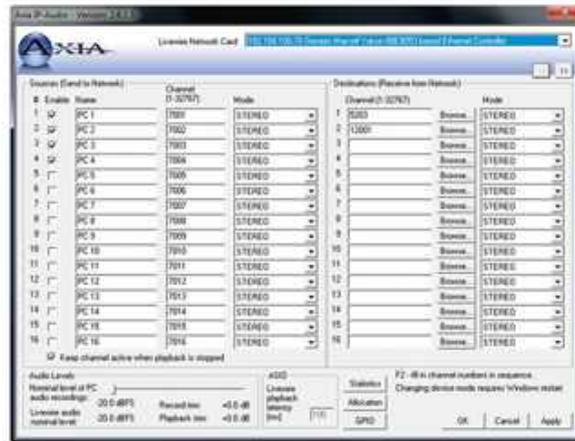

OVERVIEW

The Axia IP-Audio Driver lets you send and record single or multiple channels of stereo PC audio directly to and from Axia networks via Ethernet — no sound cards needed. Up to 24 channels of stereo audio can be sent simultaneously over a single CAT-5 Ethernet connection.

FEATURES

- Sends audio sources to the Livewire network from PC/Windows audio applications such as multichannel delivery systems and other audio players.
- Receives audio from the Livewire network to destinations on the PC/Windows system, such as audio recording applications.
- GPIO function conveys “button-press” data from the Livewire network to destination applications; i.e., a console fader start button can command a PC/Windows-based audio player to start playback.
- Axia IP-Audio Driver single-stream version emulates a standard sound card, with one stereo audio output device and one stereo audio input device. This version is suitable for typical two-channel (stereo) playback or recording applications.
- Axia IP-Audio Multichannel OEM versions emulate 4, 8 or 24 stereo sound cards (depending upon installed version), with one stereo audio output device and one stereo

audio input device per “sound card”. These versions are intended for more complex professional applications.

- Supports 5.1 Surround audio streams as well as stereo, configurable on a per-stream basis.
- Windows version includes WDM and ASIO versions for maximum system flexibility.

IN DEPTH

Pristine PC Audio: No Sound Card Required

Way back when enormous cart machines still roamed the earth freely, we used XLR connectors to get recorded audio into the console. But when PCs replaced the cart machine, we — continued to connect to their sound cards with plain-Jane XLRs and a thick bundle of discrete wires that can't carry logic, PAD or any of the useful information that PC playout systems provide. Why? With the Axia IP-Audio Driver, there's a better way.

The PC is the heart of the modern radio studio. And Axia makes it easy to connect and exchange pristine digital audio with it. The Axia IP-Audio Driver for Windows is a special Windows driver that feeds your digital audio directly from your PC's Ethernet port, through the Livewire network, to the Axia network, where the WAV-to-IP Audio conversion is performed. Up to 24 stereo playback channels and 24 stereo record channels can be accessed using our multi-stream driver that's provided by your favorite digital delivery system provider; a single-play/single-record version is available for audio workstations.

The IP-Audio Driver also provides GPIO-like start/stop and other control functions over the same network. It's available with the latest versions of high-end Windows audio delivery and editing software applications such as those from BSI, Burli, DAVID Systems, Dalet, ENCO, iMediaTouch, Netia, RCS, WideOrbit, and Zenon Media (to name just a few) and for Linux-based Rivendell through Paravel Systems — more than 20 systems and counting.

The Windows version of the IP-Audio Driver is available to broadcasters directly from Axia in 1-Stream and 4-Stream versions, and from Axia Delivery System Partners in 8-Stream and 24-Stream versions. Linux versions are available from our partner, [Paravel Systems](#).

SPECIFICATIONS

Microsoft Windows Operating System Requirements

- Windows 2000 Professional
- Windows XP Pro (32-bit, standard)
- Windows XP Home Editions
- Windows 2003 Server R2
- Windows Vista (32- and 64-bit editions)
- Windows 7 and Windows 7 Pro (32- and 64-bit editions)
- Windows 8

Minimum hardware requirements specified for your Windows operating system are sufficient to run the Axia IP-Audio Driver.